

Pebble


Inspired by nature. Coarse texture, hides dirt

Also available with Pura Backing™

ECONYL®

HydroTX™

Type	Use	Traffic	Mat Matrix
Absorbent	Indoor	High	C

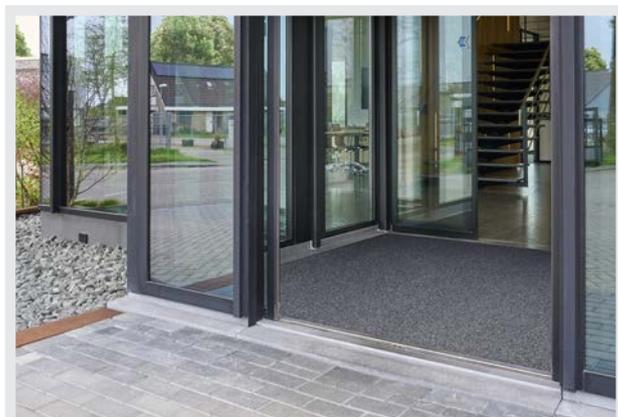

Pebble is an absorbent entrance mat that naturally camouflages dirt. This entrance mat is made from regenerated ECONYL® yarn and features HydroTX™.

Pebble is a loop pile mat, tufted from a thick yarn wrapped with two fine black filaments. This construction creates an irregular, tactile surface. Its pebble-like appearance is inspired by natural ground surfaces made of small stones.

Thanks to its organic look and calm, neutral colours, Pebble pairs easily with other materials with a natural appearance. The grey palette includes three distinct tones: Basalt – a neutral dark grey, Granite – a warm mid-grey, and Quartz – a cool light grey. The warm beige tone Sandstone completes the colour range.



Ceramics – natural stones tile dark grey with **Pebble basalt**

Matching all floors

Our designers develop colourways that complement every interior style. For ambiances ranging from classic to modern design. The broad Rinos range always has the right solution, to complement both interior design and floor type. **Make your own combination on our website and be inspired by our options.**

Colours



Basalt
PE51
NCS: 8500N



Granite
PE81
NCS: 7502Y



Sandstone
PE21
NCS: 6502Y



Quartz
PE82
NCS: 7005B20G

Specifications

PVC

PURA^{BACKING}

Pile material	100% recycled (ECONYL®) Polyamide	100% recycled (ECONYL®) Polyamide
Pile weight ISO 8543	850 g/m ²	850 g/m ²
Use classification EN 1307	32	32
Flammability Euroclass EN 13501	Cfl-s1	Cfl-s1
Sizes rolls (w*I) ***	135 cm/ 20 m ¹ , 200 cm/ 20 m ¹	135 cm/ 20 m ¹ , 200 cm/ 20 m ¹
Sizes mats (w*I) ***	60*90, 90*150 cm, 135*200 cm	60*90, 90*150 cm, 135*200 cm
Sand absorption class*	3	3
Optical class**	4,5	4,5
Absorption capacity TNO W6034	± 5,6 l/m ²	± 5,6 l/m ²
Total weight ISO 8543	ca. 3.540 g/m ²	ca. 2.940 g/m ²
Pile height ISO 1766	ca. 5,0 mm	ca. 5,0 mm
Total height ISO 1765	ca. 7,0 mm	ca. 7,0 mm
Pile density ISO 8543	0,186 g/cm ³	0,186 g/cm ³
Number of stitches ISO 1763	ca. 71.000 /m ²	ca. 71.000 /m ²
Wearing class EN 1963	32	32
Comfort EN 1307	LC2	LC2
Dimensional stability ISO 2551	< 0,4%	< 0,4%
Impact sound insulation EN 1307 annex D.	≥ 20 dB	≥ 20 dB
Light fastness ISO 105 B02	>6	>6
Water fastness ISO 105 B01	4-5	4-5
Rubbing fastness ISO 105 X12	>4	>4
Salt water ISO 105 E02	4	4
Shampoo BS 1006	4	4
Organic solvents ISO 105 X05	4	4
Static charge ISO 6356	< 2,0 kV	< 2,0 kV
Thermal resistance EN 12667	0,078 m ² K/W	0,078 m ² K/W
Slip Resistance EN 13893	DS	DS
Yarn construction	Loop Pile	Loop Pile
Design	Heathered	Heathered
Colouring	Piece dye	Piece dye
Colours	4	4
Suitability for stairs EN 1963	Incidental use	Incidental use
Suitability for castor chairs EN 985	Intensive use	Intensive use
Backing	PVC	PU
Primary backing	nonwoven PET/PA	nonwoven PET/PA
Circularity index	74 %	63 %

 Excluding loose-laid mats
EN 14041:2004

* Sand absorption classification Class 3: ≥90%, Sand absorption classification: 80% =< class 2 < 90%, Sand absorption classification Class 1: =< 80%, **Optical classification: 5 indicates highest, 1 indicates lowest, *** All listed width dimensions include a PVC edge of 1,5 cm at both sides. The roll lengths are an indication. Delivered length can be up to 15% higher or lower. Installation and maintenance advice is available at our website.

PURA^{BACKING}

Pura Backing™ is a unique Rinos product innovation, developed by our R&D department. It's the Rinos answer to increasing demand for more environmentally friendly and sustainable entrance mat solutions by avoiding the use of PVC and plasticisers. Mats with Pura Backing™ meet this requirement – with zero PVC and plasticiser content, avoiding stains on porous subfloors. Thanks to increased flexibility, it is even easier to install!

Contact us for more information

Our employees are ready to answer questions or to take your orders. **Call +31 38 385 35 00** or mail customerservice@rinos.com

Where to use?

	high traffic	medium traffic
Not combined with outdoor matting (scraping)	A	B
Combined with outdoor matting (absorbing)	C	D
Outdoor matting	E	

© Rinos B.V.

rinos.com/products/pebble