






THE NATURALS

Soft and slightly rustic oak parquet

- Soft and slightly rustic oak parquet with healthy knots up to 30 mm, dead or open knots max. 20 mm (2/plank), sporadic dark streaks, end cracks, or filled cracks are permitted.
- 99% sapwood-free.
- Discoloration, wormholes, and mechanical defects are excluded.
- Natural color.



14 x 190		
	14 mm	
	3 mm	
	190 X 600-1900 mm	



FALKIRK
NAT 019



DUNDEE
NAT 020



BELFAST
NAT 021



PAISLEY
NAT 023




LIVINGSTON
NAT 025



ABERDEEN
NAT 022

WOOD DESCRIPTION

WOOD TYPE	Oak Quercus Rubra
SELECTION	ABC(D) light rustic, limited "D" planks allowed
KNOTS	Healthy knots up to 30 mm, dead or open knots max. 20 mm (2/plank), sporadic small dark tannin streaks, end cracks, or filled cracks are permitted.
SAPWOOD	99% sapwood free
COLOR	Natural color
EXTRA INFO	Discoloration, wormholes, and mechanical defects are excluded.

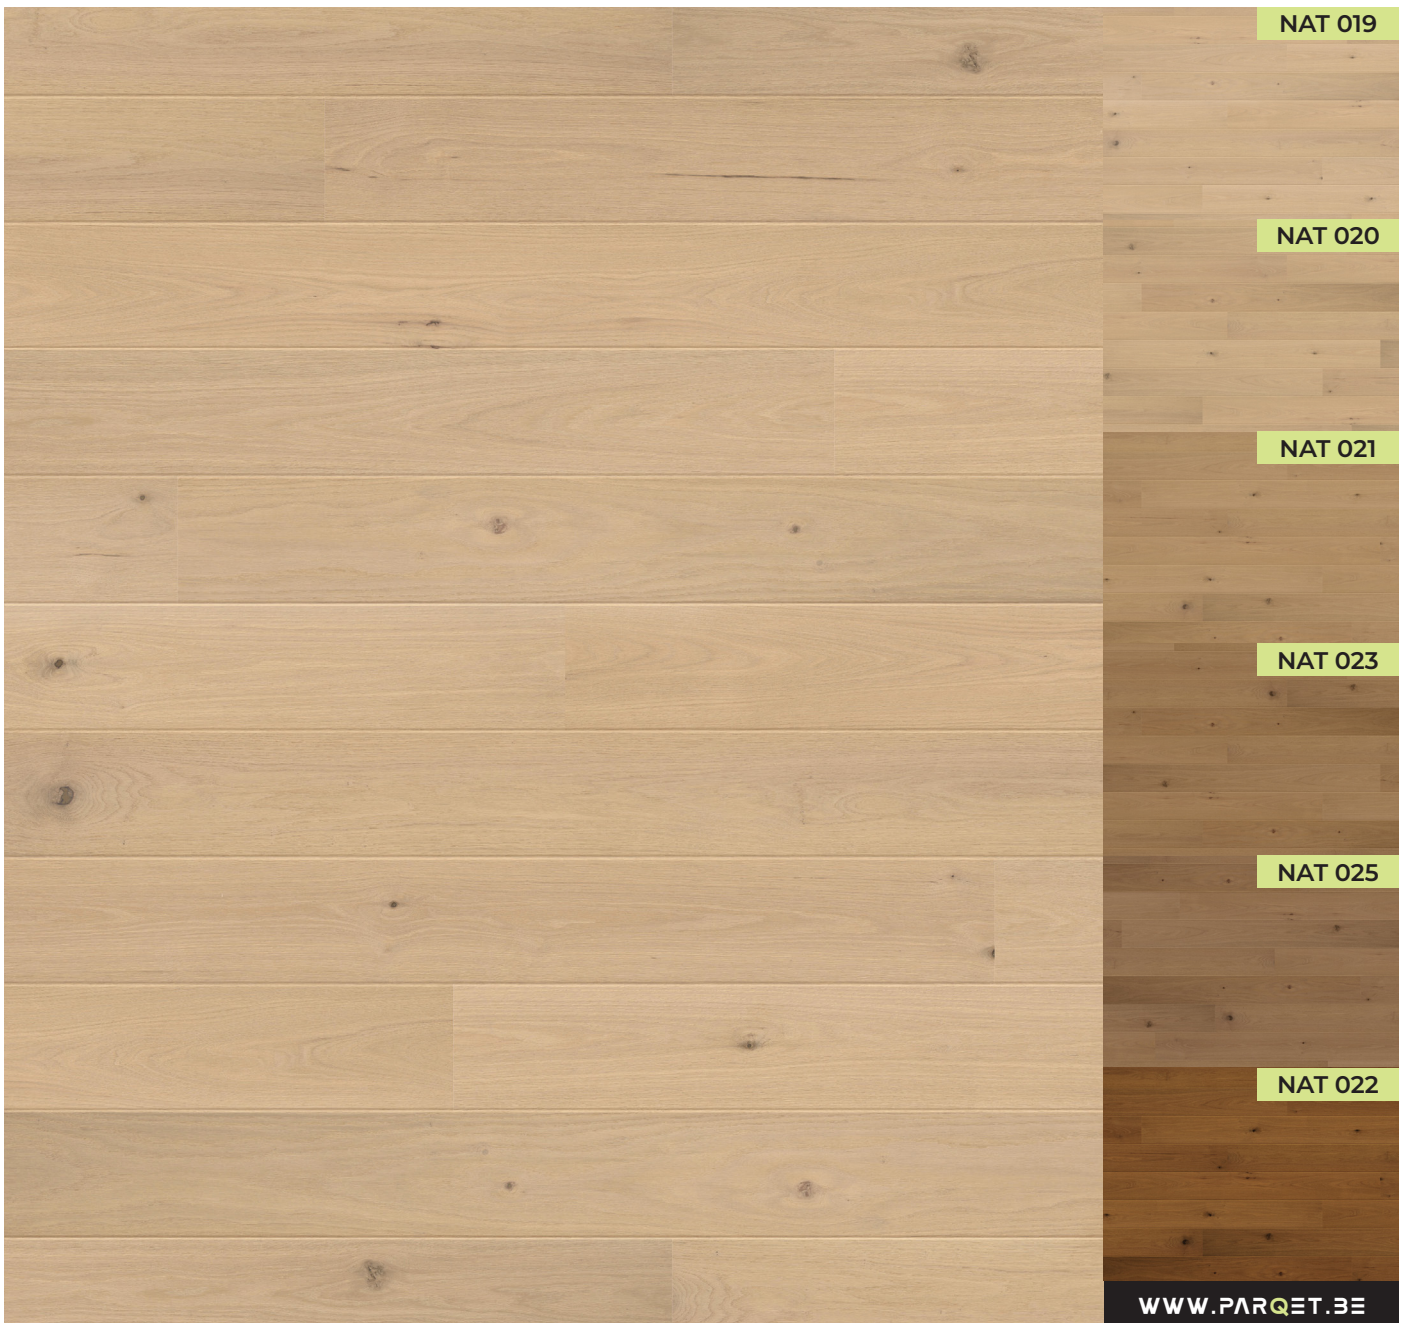

DESCRIPTION

Soft and slightly rustic oak parquet with healthy knots up to 30 mm, dead or open knots max. 20 mm (2/plank), sporadic dark streaks, end cracks, or filled cracks are permitted.
 99% sapwood-free.
 Discoloration, wormholes, and mechanical defects are excluded.
 Natural color.

TECHNICAL DATA

WOOD TYPE	Oak Quercus Rubria
FINISH/ DOP	UV lacquer NAT 019 • NAT 020 • NAT 021 • NAT 022 • NAT 023 • NAT 025
BEVEL EDGE	GO2
TEXTURE	Brushed
TOP LAYER	3 mm (±0,5 mm)
CONSTRUCTION	3-layer poplar
INSTALLATION	T&G - full bonding recommended - floating installation possible
DIMENSIONS	PLANK • 14 x 190 x 600-1900 mm
PACKAGING	BOX • 14 x 190: 8 layers of which 75% full lengths, max. 25% cut lengths (min. 600 mm) WEIGHT • 14 x 190 • ± 7,42 kg/m ² • ± 22,43 kg/box
CONTAINER	22008 kg/container • 960 box/container • 24 pallets/container
GLOSS LEVEL	5-7%
STANDARD	European standard EN 14342 : 2013
FIRE RESISTANCE	Dfl S1
FORMALDEHYDE EMISSION	E1
PCP	≤ 0.05ppm
THERMAL CONDUCTIVITY	0.12W/mK
DURABILITY CLASS	Class 2
HUMIDITY DEGREE	6-8% (± 2%)
FLOOR HEATING	Allowed, subject to compliance with applicable regulations
MAINTENANCE	See maintenance sheet

© This technical data sheet was prepared by Floorme.

All information, photos, drawings, tables, and graphs in this sheet are intended to support the product information of Floorme and may only be used in connection with the sale, installation, or specification of Floorme products.

Floorme reserves the right to make changes to the technical data, specifications, images, and product designs at any time and without prior notice.

The photos and illustrations shown, including the displayed wood selections, are for illustrative purposes only and may differ from the delivered product. No rights can be derived from this data sheet.